
QUICK START GUIDE

G30 Smart Lock G30 Keypad/Keypad Pro G30 Wi-Fi Bridge



EN DE FR IT ES NL PT PI

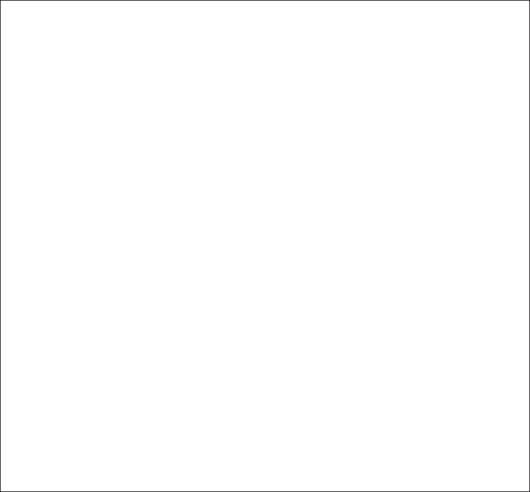


CONTENTS

English·····01-20
Deutsch·····21-41
Français······42-61
Italiano·····62-81
Español·····82-101
Netherlands······102-121
Português·····122-139
Polski·····140-163


I. Product Overview

G30 Smart Lock

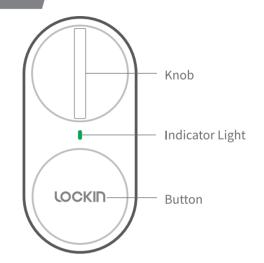


Product Specifications			
Model	G30 Smart Lock	G30 Keypad/Keypad Pro	G30 Wi-Fi Bridge
Power Supply	4*AA Alkaline Batteries	2*AA Alkaline Batteries	USB Type-C (5V, adapter not included)
Working Environment	0-50°C, 90%RH, no condensation	-20 -50°C, 90%RH no condensation	0-50°C, 90%RH, no condensation

G30 Keypad/Keypad Pro

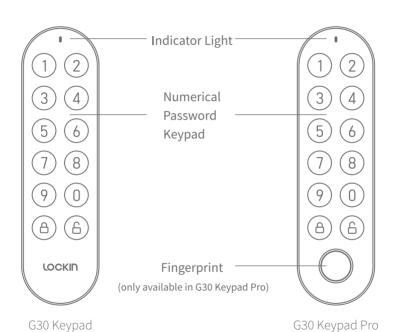

G30 Wi-Fi Bridge

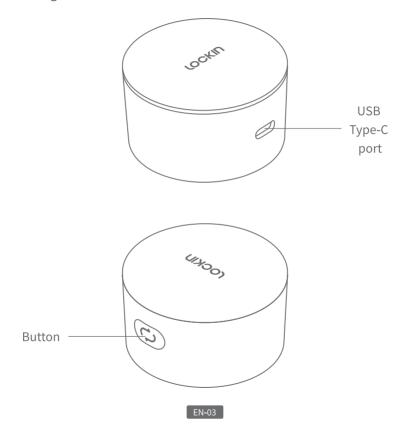


II. Pairing Guide

- 1. Download the Lockin Home App and sign in or create an account.
- A) Scan the QR Code below to download







- *The Apple logo and App Store are trademarks of Apple Inc., registered in the U.S. and other countries and regions.
- *Google Assistant, Google Home, Google Play, and the Google Play logo are trademarks of Google LLC.
- B) Search for the Lockin Home in Apple App Store or Google Play
- *Developed by: YUNDING INTERNATIONAL PTE. LTD.
- 2. Follow the instructions below to pair your mobile device and Lockin Smart Lock.
- 2.1. Remove the battery cover, install four alkaline dry batteries, remove the insulation strip, and then close the battery cover.

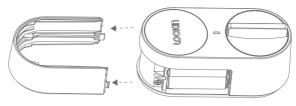

- *1. Use 1.5V AA alkaline batteries only. Do not mix new and old batteries.
- *2. Do not use rechargeable batteries.
- 2.2. Long press the button of G30 Smart Lock for about 3 seconds until you hear a "beep" sound, and you will see the green light blinks, which indicates that the device is in the pairing mode.




- 2.3. Open the Lockin Home App and follow the steps below to complete the pairing.
- a) Tap the "+" button in the upper right corner
- b) Tap Add Manually
- c) Tap G30 Smart Lock
- d) Follow the prompts on the app to complete the pairing
- *Make sure that your mobile phone's Bluetooth is enabled, and the Lockin Home App is allowed to access your mobile phone's Bluetooth services.
- 2.4. Follow the prompts on the app to calibrate. If you have skipped the calibration or there are calibration errors, you may follow the steps below to complete the recalibration.
- a) Tap G30 Smart Lock on the app homepage to enter the G30 Smart Lock page
- b) Tap Settings
- c) Tap Initial Setup Guide
- 3. Follow the instructions below to pair your mobile device and the G30 Keypad/Keypad Pro.
- 3.1. Remove the battery cover, install two alkaline dry batteries, and close the battery cover.
- *1. Use 1.5V AA alkaline batteries only. Do not mix new and old batteries.
- *2. Do not use rechargeable batteries.

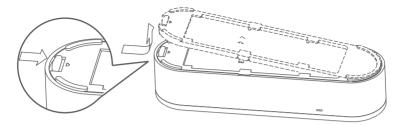

3.2. Press the unlock button of G30 Keypad/Keypad Pro three times then you hear a "beep" sound, and then you will see the green light blinking, indicating the device is

in the pairing mode.



- 3.3. Open the Lockin Home App and follow the steps below to complete the pairing.
- a) Tap the "+" button in the upper right corner
- b) Tap Add Manually
- c) Tap G30 Keypad/Keypad Pro

d) Follow the prompts on the app to complete the pairing

*Make sure that your mobile phone's Bluetooth is enabled, and the Lockin Home App is allowed to access your mobile phone's Bluetooth services.

4. Follow the instructions below to pair the G30 Smart Lock and the G30 Keypad/Keypad Pro.


- a) Tap G30 Smart Lock on the app homepage to enter the G30 Smart Lock page
- b) Tap the bottom of the G30 Smart Lock page, wait for about 5s to complete the Bluetooth connection






- c) Return to the app homepage and tap G30 Keypad/Keypad Pro
- d) Tap the middle of the G30 Keypad/Keypad Pro page, and wait for about 5s to complete the Bluetooth connection




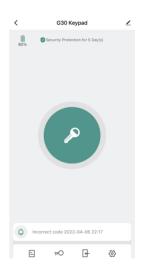

e) Tap the icon at the bottom of the G30 Keypad/Keypad Pro page

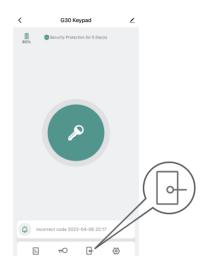

- f) Tap Add
- g) Select the G30 Smart Lock
- h) Tap Start Binding
- i) Wait for about 10s to pair the G30 Smart Lock and the G30 Keypad/Keypad Pro
- 5. Follow the instructions below to pair your mobile device and the G30 Wi-Fi Bridge.
- 5.1. Power on the G30 Wi-Fi Bridge with a USB Type-C cable (with your own adapter).

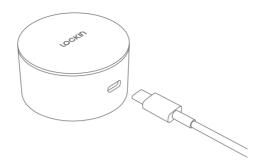

- 5.2. Remove the release liner of the adhesive tape on the back of the G30 Wi-Fi Bridge and stick it wherever you want on a desktop.
- 5.3. Open the Lockin Home App and follow the steps below to complete the pairing.
- a) Tap the "+" button in the upper right corner
- b) Tap Add Manually
- c) Tap G30 Wi-Fi Bridge
- d) Enter a Wi-Fi name and password
- e) Wait for a few minutes for the G30 Wi-Fi Bridge to connect to the network, and then complete the pairing
- *Only 2.4GHz Wi-Fi is supported, and 5GHz Wi-Fi is not supported.
- * Note capitalization and special symbols when entering a Wi-Fi name and password.

- 6. Follow the instructions below to pair the G30 Smart Lock/G30 Keypad/Keypad Pro and G30 Wi-Fi Bridge.
- a) Tap G30 Wi-Fi Bridge on the app homepage to enter the G30 Wi-Fi Bridge page
- b) Tap Add existing
- c) Select G30 Smart Lock and G30 Keypad/Keypad Pro
- d) Tap Confirm
- e) Wait for about 20s to pair the G30 Smart Lock/G30 Keypad/Keypad Pro and the G30 Wi-Fi Bridge
- f) Tap Finish
- 7. At this point, all pairing for the devices has been completed.

III. Function Description

Note:

1. When your phone is connected to G30 Smart Lock, for security reasons, the door can only be unlocked via the app, and unlocking via Keypad is not allowed. After you exit from the app or cease to operate the app for 10s, the Keypad can be used to unlock the door again.

2. If you cease to operate the app for 10s, the Bluetooth connection between the lock and your phone will be automatically severed. It is normal for a Bluetooth reconnection prompt to appear on the app.

Function	How to Set	Descriptions
Permanent Password	1. Open the Lockin Home app 2. Tap G30 Keypad/Keypad Pro 3. Tap 4. Tap 5. Select Online Password > Permanent Password 6. Select the lock 7. Select a member 8. Enter the password and password name, etc. 9. Tap Save	Permanent passwords are for fixed users They can only be issued when the Gateway is online or the mobile phone is connected via Bluetooth.
Online One-Time Password	1. Open the Lockin Home app 2. Tap G30 Keypad/Keypad Pro 3. Tap 4. Tap 5. Select Online Password > One-time Password 6. Select the lock 7. Enter the password and password name, etc. 8. Tap Save	The password can be used only once before it expires. They can only be issued when the Gateway is online or the mobile phone is connected via Bluetooth.
Online Time-Limited Password	1. Open the Lockin Home app 2. Tap G30 Keypad/Keypad Pro 3. Tap TO 4. Tap 5. Select Online Password > Time-Limited Password 6. Select the lock 7. Enter the password and password name, etc. 8. Tap Save	The password can be used multiple times before it expires They can only be issued when the Gateway is online or the mobile phone is connected via Bluetooth.

Offline One-Time Password	1. Open the Lockin Home app 2. Tap G30 Keypad/Keypad Pro 3. Tap TO 4. Tap \$\circ\$ 5. Select Offline Password > One-time Password 6. Tap Obtain Password 7. Enter the password and name 8. Tap Don	The password is valid for 6 hours and can only be used once before it expires The password can also be issued offline.
Offline Time-Limited Password	1. Open the Lockin Home app 2. Tap G30 Keypad/Keypad Pro 3. Tap 4. Tap 5. Select Offline Password > Time-Limited Password 6. Enter the expiration time 7. Tap Get Password 8. Enter the password name 9. Tap Don	Use the password at least once within 24 hours when the password takes effect. Otherwise, the password becomes invalid. The password can also be issued offline.
Offline Clearing Code	1. Open the Lockin Home app 2. Tap G30 Keypad/Keypad Pro 3. Tap 4. Tap 5. Select Offline Password > Clearing Code 6. Select Clear All / Clear One 7. Tap Get Clearing Code 8. Tap Done	The clearing code can only be used to clear one or all offline time-limited passwords. An offline clearing code cannot be deleted. Its validity period is consistent with that of the cleared offline time-limited password. The password can also be issued offline.
Bluetooth Unlock	Open the Lockin Home app Tap G30 Smart Lock Slide the key button at the bottom of the screen to the right	When the Gateway is online, the lock can be controlled remotely. When your mobile phone is connected to the lock via Bluetooth, the lock can be controlled at close range.

Fingerprint Unlock (G30 Keypad is not supported, and G30 Keypad Pro is supported)	1. Open the Lockin Home app 2. Tap G30 Keypad/Keypad Pro 3. Tap →o 4. Select Fingerprint 5. Tap ⊕ 6. Select the lock 7. Select a member 8. Collect fingerprints 9. Tap Sav	It is best to collect the fingerprints of the same finger at multiple angles, so that the collected fingerprints are more complete, enabling faster unlocking.
Auto Lock (With Door Sensor)	(A door sensor has been installed before calibrating the lock) 1. Open the Lockin Home app 2. Tap G30 Smart Lock 3. Tap Settings 4. Enable Auto Lock 5. Set any "Auto Lock Time"	Door sensor refers to a sensor that allows the lock to detect the magnetic field strength for auto lock after the door is closed. When the lock is calibrated after the door sensor has been correctly installed, the lock enters the With Door Sensor Mode. If there is a door sensor, G30 Smart Lock will automatically
Auto Lock (Without Door Sensor)	(No door sensor has been installed before calibrating the lock) 1. Open the Lockin Home app 2. Tap G30 Smart Lock 3. Tap Settings 4. Enable Auto Lock 5. Set any "Auto Lock Time"	close if the specified "Auto Lock Time" has elapsed after G30 Smart Lock detects the magnetic field (after the door is closed). An alarm will be triggered if the door is not closed and not locked after the "Door Open Alarm Time" has elapsed. If there is no door sensor, G30 Smart Lock will automatically close when the specified "Auto Lock Time" has elapsed after it opens. An alarm will be triggered if the door is not locked when the "Door Open Alarm Time" has elapsed.
Temporarily Disable Auto Lock	After enabling Auto Lock, press G30 Smart Lock button three times.	Restore to Auto Lock: press G30 Smart Lock button three times, or lock once.

IV. Light Indication

1. G30 Smart Lock

Solid green: unlocked/locked successfully

Blinking green: pairing mode

Solid red: unlock failure/lock failure

Blinking red: low battery warning/locked jam warning

2. G30 Wi-Fi Bridge

Blinking pink and blue alternately: unpaired Solid pink: paired and connected to the network Solid blue: paired but not connected to the network

3. G30 Keypad/Keypad Pro

The indicator light is blinking red: low battery warning

The numeric keypad is blinking green: pairing mode

The numeric keypad is in solid green: correct password/press the close


button

The numeric keypad is in solid red: wrong password

V. Installation Instructions

I. G30 Keypad/Keypad Pro

1. Drill holes or fix the Keypad bottom plate to the wall with adhesive



2. Fix the Keypad on the bottom plate





II. G30 Wi-Fi Bridge

Remove the release liner of the adhesive tape on the Wifi Bridge back and stick it wherever you want



VI. FAQs and Solutions

1. What should I do when the device cannot be bound?

Reinstall the Lockin Home App, make sure that your mobile phone's Bluetooth is enabled and that the Lockin Home App is allowed to access your mobile phone's Bluetooth service, power on the device again and bind it with your mobile phone on the Lockin Home App.

- 2. What should I do when the Wifi Bridge cannot connect to the network successfully?
- A) Long press the Wifi Bridge button for about 10s until the indicator light is off for about 1s, and then the Wifi Bridge will be restored and reset
- B) Follow the pairing instructions above to re-pair the Wifi Bridge

3. How to restore to factory settings?

G30 Smart Lock: The device is restored to factory settings when it is unbound. There is no restore to factory settings button.

G30 Keypad/Keypad Pro: The device is restored to factory settings when it is unbound. There is no restore to factory settings button.

G30 Wi-Fi Bridge: The device is restored to factory settings when it is unbound. You can long press the Wifi Bridge button for about 10s until the indicator light is off for about 1s to unbind the device.

*The device will be restored to factory settings and automatically unlocked only when the following two conditions are met:

- ***The device has been unbound via the Lockin Home App.
- *** Lockin Home App is able to communicate with the device via Bluetooth.
- 4. What should I do when the lock or keypad stops working after working for a while? Please take out the batteries to power off the device for about 2 minutes, and then install new AA alkaline dry batteries. Do not mix new and old batteries, or use rechargeable batteries.
- 5. What can I do when the door cannot be unlocked via the Keypad?
- (1) Check whether the password is correct or whether it has expired.
- (2) Check whether the Keypad is too distant from the lock. It is recommended that the distance between the Keypad and the lock should not exceed 3m.
- (3) When your phone is connected to G30 Smart Lock, for security reasons, the door can only be unlocked via the app, and unlocking via Keypad is not allowed. After you exit from the app or cease to operate the app for 10s, the Keypad can be used to unlock the door again.

6. What can I do when the app asks for Bluetooth reconnection?

If you cease to operate the app for 10s, the Bluetooth connection between the lock and your phone will be automatically severed. It is normal for a Bluetooth reconnection prompt to appear on the app.

7. Lock and keypad cannot be linked/delinked:

- 1. Remove lock and keypad from the gateway, if they are both bound to the gateway.
- 2.Please check if both lock and keypad have established Bluetooth connection with your phone, if they are not bound to the gateway.

pomocą klawiatury nie jest dozwolone. Po wyjściu z aplikacji lub przestaniu obsługiwać aplikację na 10s, klawiatura może zostać użyta do ponownego odblokowania drzwi.

- **6.** Co mogę zrobić, gdy aplikacja poprosi o ponowne połączenie Bluetooth? Jeśli przestaniesz obsługiwać aplikację na 10s, połączenie Bluetooth między zamkiem a telefonem zostanie automatycznie zerwane. To normalne, że w aplikacji pojawia się monit ponownego połączenia Bluetooth.
- 7. Blokada i klawiatura nie mogą być połączone/oddzielone:
- 1. Usuń blokadę i klawiaturę z bramy, jeśli oba są związane z bramą.
- 2. Sprawdź, czy zarówno zamek, jak i klawiatura nawiązały połączenie Bluetooth z telefonem, czy nie są związane z bramą.

Federal Communication Commission Interference Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular

installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- ·Reorient or relocate the receiving antenna.
- ·Increase the separation between the equipment and receiver.
- ·Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- ·Consult the dealer or an experienced radio/TV technician for help.

FCC Caution:

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

FOR MOBILE DEVICE USAGE (>20cm/low power)

Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Industry Canada statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two

conditions:

- 1)This device may not cause interference.
- 2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- 1)L'appareil ne doit pas produire de brouillage;
- 2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

FOR MOBILE DEVICE USAGE (>20cm/low power)

Radiation Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux radiations IC CNR-102 établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec une distance minimale de 20cm entre le radiateur et votre corps.

CAUTION

Risk of explosion if the battery is replaced an incorrect disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion; leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas;

battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.

EU Declaration of Conformity

Hereby, [Name of manufacturer] declares that the radio equipment type [designation of type of radio equipment] is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:http://www.lockin.com

Operation Frequency:

Lockin Smart Lock	Y1	2402MHz to 2480MHz
Lockin keypad	P1 or P1-Pro	2402MHz to 2480MHz
Lockin WiFi Bridge	G1	2402MHz to 2480MHz;2412MHz to 2472MHz

Maximum Output Power:

Lockin Smart Lock	Y1	4dBm
Lockin keypad	P1 or P1-Pro	4dBm
Lockin WiFi Bridge	G1	BT:4dBm; WiFi 802.11b/g/n 13.5dBm

Under normal use of condition, this equipment should be kept a separation distance of at least 20 cm between the antenna and the body of the user.


WEEE Information



All products bearing this symbol are waste electrical and electronic equipment (WEEE as in directive 2012/19/EU) which should not be mixed with unsorted household waste.

Instead, you should protect human health and the environment by handing over your waste

equipment to a designated collection point for the recycling of waste electrical and electronic equipment, appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. Please contact the installer or local authorities for more information about the location as well as terms and conditions of such collection points.

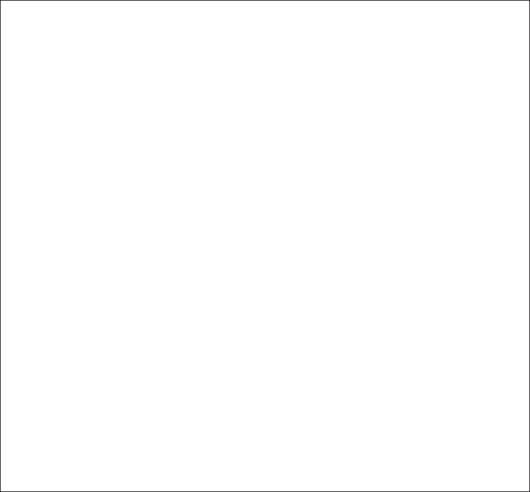



www.lockin.com

support@lockin.com Chongqing Luxiangjia Technology Co., Ltd.

No.50 Industrial Avenue, Pulu Street, Tongliang District, Chongqing